



# LolliPop™



## SCREW-LOCK BALL COOLANT NOZZLE WITH INTEGRAL COPPER TUBE FOR CNC LATHES



- Just cut the copper tube to your desired length and bend as required
- Space efficient design is ideal for tight spaces
- Ideal for machines with live tooling
- Unlimited routing possibilities
- Rated to 500 psi (33 bar)
- Sizes available to fit almost every machine or toolholder
- Choose 3/16" tubing for ease of bending or 1/4" tubing for maximum flow

### DIMENSIONS IN INCHES (except as noted)

Part No.	Ball Dia. "D"	Tubing Size "A"	Tubing I.D. "d"	Pkg Qty
LP05500	8 mm	4 mm	2 mm	5
LP05501	9 mm	3/16"	.12	5
LP05502	10 mm	3/16"	.12	5
LP05504	11 mm	3/16"	.12	5
LP05506	12 mm	3/16"	.12	5
LP05508	12 mm	1/4"	.18	5
LP05510	14 mm	3/16"	.12	5
LP05512	14 mm	1/4"	.18	5
LP05514	15 mm	3/16"	.12	5
LP05516	15 mm	1/4"	.18	5
LP05518	18 mm	3/16"	.12	5
LP05520	18 mm	1/4"	.18	5
LP05522	22 mm	3/16"	.12	5
LP05524	22 mm	1/4"	.18	5
LP05526	3/8 inch	3/16"	.12	5
LP05530	1/2 inch	3/16"	.12	5
LP05532	1/2 inch	1/4"	.18	5
LP05534	5/8 inch	3/16"	.12	5
LP05536	5/8 inch	1/4"	.18	5

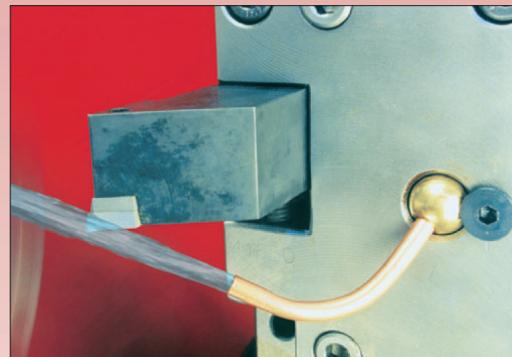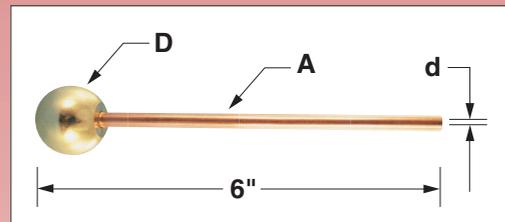

LolliPop nozzle shown installed in lathe turret.

Material: Ball - Brass • Tube - Copper • Solder - Lead Free  
 Maximum Operating Temperature: 300°F (150°C)  
 Maximum Pressure: 500 PSI (33 bar)

### Ordering Information

Measure the diameter of the original ball in your machine and order the nominal diameter to suit (specify desired tubing size).